

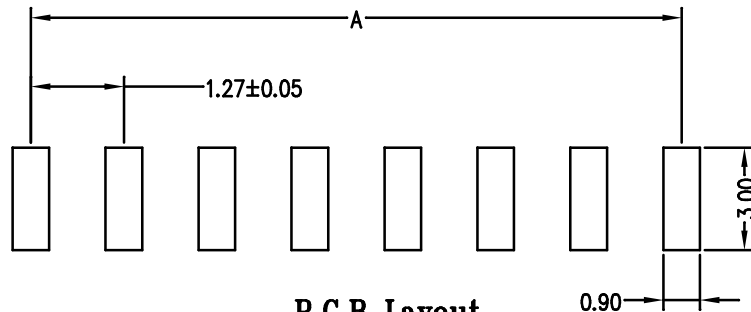
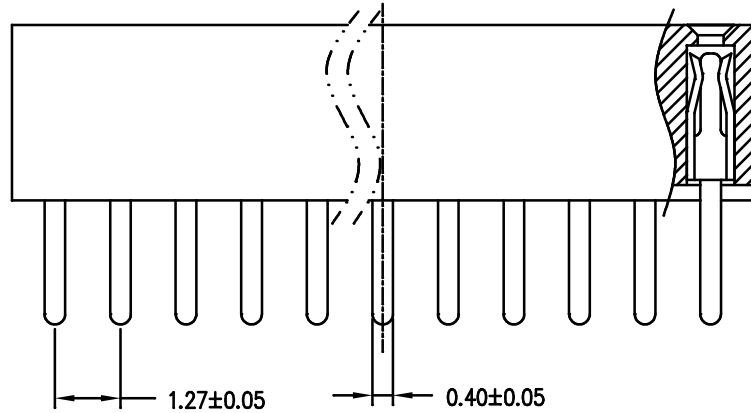


客户确认
签字处

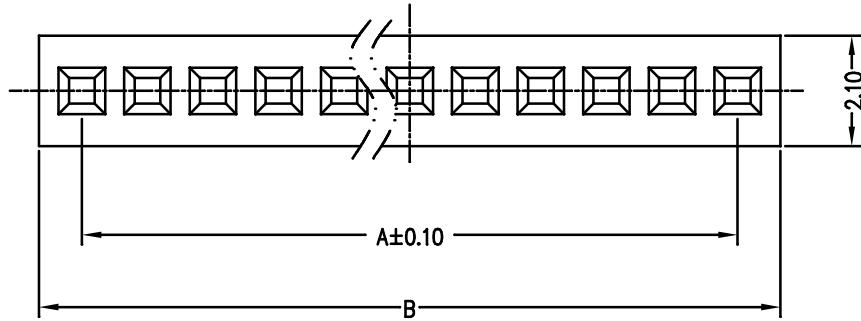

P.C.B Layout

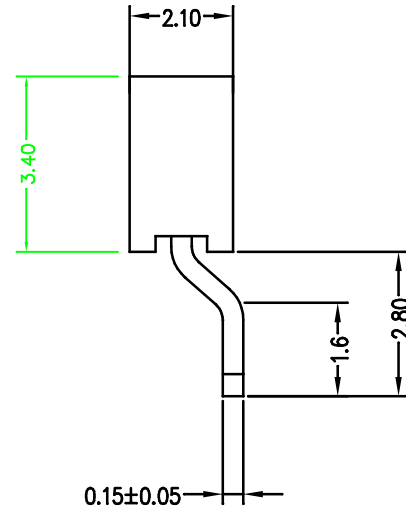

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator Resistance: 500 MΩ MIN
 Dielectric Withstanding: AC 500V
 Contact resistance: 20mΩ MAX.
 Operating Temp.: -40°C ~ +105°C
 Max processing Temp: 230°C for 30~60 seconds
 (260°C for 10 seconds)
 Insulator Material: PA6T UL94V-0 ROHS
 Contact Material: Phosphor Bronze
 Plated(*Standard): Gold flash all over

PIN Number	Dimension(mm)		PIN Number	Dimension(mm)	
	A	B		A	B
1*2P	1.27	2.94	1*27P	33.02	34.69
1*3P	2.54	4.21	1*28P	34.29	35.96
1*4P	3.81	5.48	1*29P	35.56	37.23
1*5P	5.08	6.75	1*30P	36.83	38.50
1*6P	6.35	8.02	1*31P	38.10	39.77
1*7P	7.62	9.29	1*32P	39.37	41.04
1*8P	8.89	10.56	1*33P	40.64	42.31
1*9P	10.16	11.83	1*34P	41.91	43.58
1*10P	11.43	13.10	1*35P	43.18	44.85
1*11P	12.70	14.37	1*36P	44.45	46.12
1*12P	13.97	15.64	1*37P	45.72	47.39
1*13P	15.24	16.91	1*38P	46.99	48.66
1*14P	16.51	18.18	1*39P	48.26	49.93
1*15P	17.78	19.45	1*40P	49.53	51.20
1*16P	19.05	20.72	1*41P	50.80	52.47
1*17P	20.32	21.99	1*42P	52.07	53.74
1*18P	21.59	23.26	1*43P	53.34	55.01
1*19P	22.86	24.53	1*44P	54.61	56.28
1*20P	24.13	25.80	1*45P	55.88	57.55
1*21P	25.40	27.07	1*46P	57.15	58.82
1*22P	26.67	28.34	1*47P	58.42	60.09
1*23P	27.94	29.61	1*48P	59.69	61.36
1*24P	29.21	30.88	1*49P	60.96	62.63
1*25P	30.48	32.15	1*50P	62.23	63.90
1*26P	31.75	33.42			

深圳市凯锐升电子有限公司 SHENZHEN KRS ELECTRONICS CO., LTD.				REV: AO		
TITLE: PITCH1.27mm FEMALE HEADER SMT 环保料				UNITS: mm		
PART No:		DWG NO. 240113-01		DATE: 24/01/13	SCALE: 1:1	PROL: [Symbol]
SCALE: 1:1		PAGE: 1/1		DATE: [Blank]	SCALE: 1:1	PROL: [Symbol]
SCALE: 1:1		PAGE: 1/1		DATE: [Blank]	SCALE: 1:1	PROL: [Symbol]